


231S

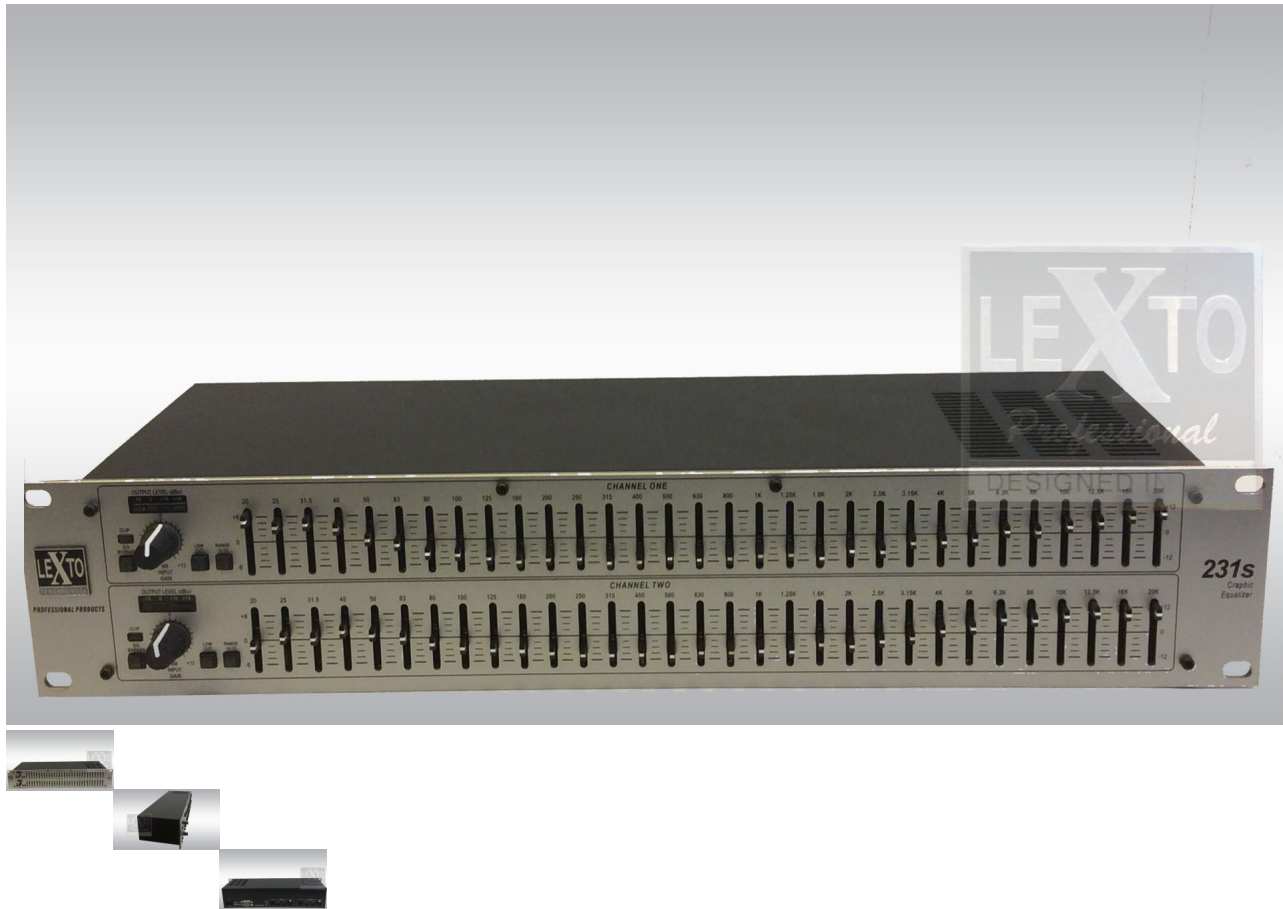

Rating: Not Rated Yet

[Ask a question about this product](#)

Description	Input Connectors	: 1/4" TRS, female XLR (pin 2 hot)
	Input Type	: Electronically balanced/unbalanced, RF filtered
	Input Impedance	: Balanced 40k ohm, unbalanced 20k ohm
	Max Input	: >+21dBu balanced or unbalanced
	CMRR	: >40dB, typically >55dB at 1kHz
	Output Connectors	: 1/4" TRS, male XLR (pin 2 hot)
	Output Type	: Impedance-balanced/unbalanced, RF filtered
	Output Impedance	: Balanced 100 ohm, unbalanced 50 ohm
	Max Output	: >+21dBu balanced/unbalanced into 2k ohm or greater; >+18dBm balanced/unbalanced (into 600 ohm)
	Bandwidth	: 20Hz to 20kHz, +0.5/-1dB
	Frequency Response	: <10Hz to >50kHz, +0.5/-3dB
	Dynamic Range	: 108dB
	Signal to Noise Ratio	: 90dB
	THD+Noise	: <0.004%
	Interchannel Crosstalk	: <-80dB, 20Hz to 20kHz
	Bypass Switch	: Bypasses the graphic equalizer section in the signal path

Low cut Switch	: Activates the 50Hz 12dB/octave high-pass filter
Range Switch	: Selects either +/- 6dB or +/-12dB slider boost/cut range
Operating Voltage	: 100VAC 50/60Hz; 120VAC 60Hz; 230VAC 50/60Hz
Power Consumption	: 15W
Power Connector	: IEC receptacle