
MAI-200



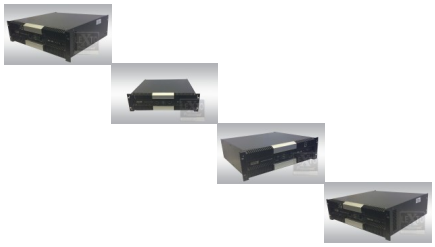

Rating: Not Rated Yet
Ask a question about this product

Description : 2- Channel independent fourth-order Linkwitz-Riley crossovers
: DDT
: Revolutionary IPR class D topology
: Detented input controls
: Speakon output connectors
: Light Weight
: LED illuminated
: Combi XLR 1/4\" inputs
: Rated Watts 2ch x 2 ohms: 1100 watts 20ms repetitive burst / 900 watts 1% THD both channels driven @ 1kHz.
: Rated Watts 2ch x 4 ohms: 600 watts 20ms repetitive burst / 570 watts 1% THD / 530 watts 0.15% THD, both channels driven @ 1kHz.
: Rated Watts 2ch x 8 ohms: 370 watts 20ms repetitive burst / 325 watts 1% THD / 300 watts 0.15% THD, both channels driven @ 1kHz.
: Individual signal pass 1/4\" jacks on each channel
: Weight Unpacked: 8.16 lb(3.7 kg)

: Weight Packed: 10.80 lb(4.9 kg)
: Width Packed: 12.4\"(31.496 cm)
: Height Packed: 21\"(53.34 cm)
: Depth Packed: 4.7\"(11.938 cm)